Thermo Scientific Jewett Dual-Temperature Refrigerator/Freezer Combination

Dependable combination models for general purpose laboratory sample and reagent storage

Model No: PRF17 – dual temperature refrigerator/ freezer combination

Our versatile laboratory refrigerator/freezer combination units offer the advantage of two laboratory-grade performance cabinets in a single, space-saving unit. Both sub-units are heavily insulated and controlled by a micro-processor temperature management system.

- Forced-air circulation for temperature uniformity
- Epoxy-coated steel exterior
- Stainless steel interior
- CFC-free, foamed-in-place, polyurethane insulation
- Self-closing door with magnetic gasket for a tight seal
- Chrome-plated door latches on each door with adjustable cylinder keyed locks
- Fluorescent interior lighting (refrigerator)
- Microprocessor temperature control, set to operate at 2 to 4°C (refrigerator), -20°C (freezer). Freezer portion is not settable but will run colder than -20°C under nomal ambient conditions.
- Digital refrigerator temperature display
- Automatic defrost in both cabinets
- Heavy-duty, 1/3 H.P. hermetically-sealed condensing unit
- CFC-free R-404a / R-134a refrigerants
- 2" (51mm) casters, front swivel and lock
- 1" (25mm) access port located on back of each cabinet
- Adjustable stainless steel refrigerator drawers (4" depth)
- Exoxy coated wire freezer shelves

Thermo SCIENTIFIC

Thermo Scientific Jewett Dual-Temperature Refrigerator/Freezer Combinations*

Model No.	Capacity cu. ft. (L)	Temperature Range	Amps	Voltage	Drawers and Shelves	Doors	Exterior Dimensions H x W x D in. (mm)	Interior Dimensions H x W x D in. (mm)	Shipping Weight lbs. (kg)
PRF17-1B	**Ref:** 11 (311.4) **Frz:** 4.7 (133)	**Ref:** +2°C to +4°C **Frz:** -20°C	10.5	120V / 60Hz	**Ref:** 3 drawers **Frz:** 1 shelf	2 solid	73.9 x 29 x 30 (1876 x 737 x 762)	**Ref:** 34.5 x 24.8 x 24 (876 x 629 x 610) **Frz:** 14.5 x 24.8 x 24 (368 x 629 x 610)	550 (249)
PRF17-2A**			6	230V / 50Hz					

Optional Accessories for Dual-Temperature

Model No.	Description
7463TA	Additional refrigerator drawer
7466TA	Additional freezer shelf
7470TA	Left door hinge
7472TA	Installed HemaPro™ 2000 surveillance center with display and alarms

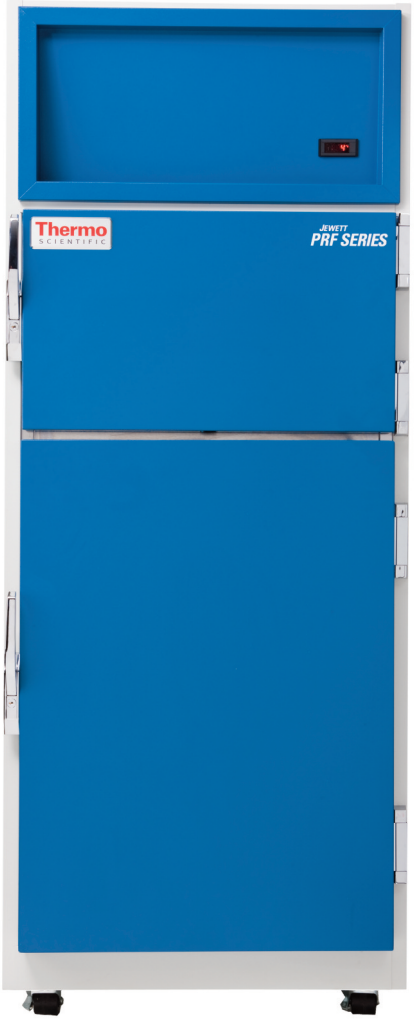

HemaPro 2000 Surveillance Center

- Comes installed in PRF-17 top panel as an accessory
- Gives display of both freezer and refrigerator temperatures
- Adjustable high and low temperature alarms
- Door ajar alarm
- Compressor health alarm
- Alarm test function – simulates alarm conditions to confirm proper operation
- Battery back-up power for alarms
- Electronic event log records time, date and duration of alarm conditions

Model 7472TA – Optional HemaPro 2000 surveillance center with alarms

c UL us

* Models come with castors; leveling legs are not offered.
** Not CE marked

thermoscientific.com/cold

© 2012 Thermo Fisher Scientific Inc. All rights reserved. All trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representative for details.

Australia +61 39757 4300
Austria +43 1 801 40 0
Belgium +32 53 73 42 41
China +86 21 6865 4588 or
+86 10 8419 3588
France +33 2 2803 2180
Germany national toll-free 0800 1 536 376
Germany international +49 6184 90 6000

India toll free 1800 22 8374
India +91 22 6716 2200
Italy +39 02 95 05 92 54
Japan +81 45 453 9220
Netherlands +31 76 579 55 55
New Zealand +64 9 980 6700
Nordic/Baltic/CIS Countries
+358 9 329 10200

Russia +7 812 703 42 15
Spain/Portugal +34 93 223 09 18
Switzerland +41 44 454 12 22
UK/Ireland +44 870 609 9203
USA/Canada +1 866 984 3766 (866-9-THERMO)

Other Asian Countries +852 2885 4613
Countries not listed: +49 6184 90 6000

Thermo SCIENTIFIC
Part of Thermo Fisher Scientific